


### **SMOOTH MILKY WHITE FINISH**

NO SHRINKAGE CRACKS

FASTER **SETTING TIME** 

**ECONOMICAL** THAN TRADITIONAL PLASTERING



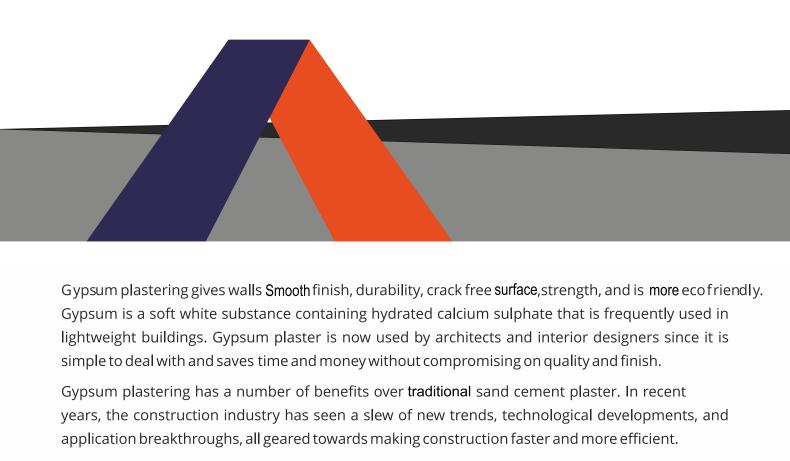

Gypsum Plaster can be applied directly on bricks, solid and hollow blocks, AAC blocks, and plasterboards. Gypsum plaster is an excellent heat resistant as well as fire and impact resistant.

In addition, gypsum plaster saves time and consumes less water & it doesn't require water curing Gypsum plastering is considered to be the faster method of plastering, since it will set in less than 30 minutes time and fit for primer/ paint application in 5-10 days of plastering.


Gypsum plaster provides putty finish to the walls and saves cost and time of putty work too.

Gypsum plaster have low thermal conuctivity as compared to sand-cement plaster and reduces your electricity bills.

Gypsum plaster have acoustic properties owing to its affinity to absorb air-born sounds.

Gypsum plaster never leaves a single mark on the wall even after repeated number of plastering.



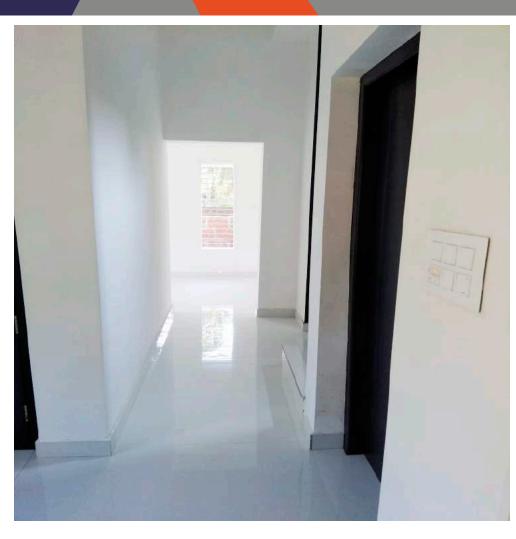

When sand cement plastering requires 60-120 minutes to get set on the wallgypsum barely needs 15 minutes.


Shrinkage and cracks in wall are always a bad dream for everyone who looks out for a great wall. Gypsum wall's thermal conductivity is very low & hence is adaptive at keeping your home cool

during summers and warm during winters.

The high resistant nature to fire and mould protects your wall and ceilings for a long time.

My gypsum- We import our product from Iran where the milky white gypsum plaster powder is manufactured and exported to all over the world.

There are so many brands in the market which claim to be originated from Iran and may not provide you the best results of gypsum plastering.

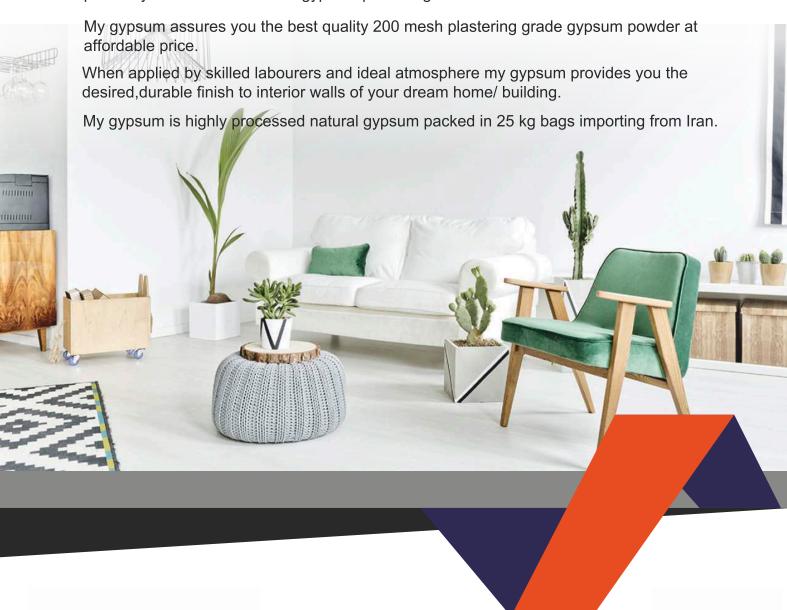



# My home



## My gypsum

### **Test Report**

#### **PRODUCT / PARAMETERS**

MY GYPSUM PLASTER

Setting Time	12 To 25Minutes
Coverage Per 1000Kg/12Mm	880sq.ft
Compressive Strength	55 - 60Kg / Sq.cm
Flexural Strength	30 - 35Kg / Sq.cm
Bulk Density	0.85 - 0.9Gms / Cu - Cms
Modules Of Ratio ( Kg Per Cm' )	40Kg / Sq.cms
Consistency ( Water: Plaster Ratio )	(65Ml - 70Ml) : (100/Gm)

#### The best storage condition:

In a dry place away from moisture and the correct distance from the earth, should be kept in stock. Should be consumed within one year from the date of production.

Packaging - PP bag of 25 kg

Address: 64/1378-D3, Ground Floor,

Shastri nagar colony road, East Nadakkave, Kozhikode.

**Mail:** info@mygypsum.com **Mob:** +91 9605895000

